


SYNTHETIC GRASS CONCRETE/ROOFTOP DECK & PATIO SYSTEM

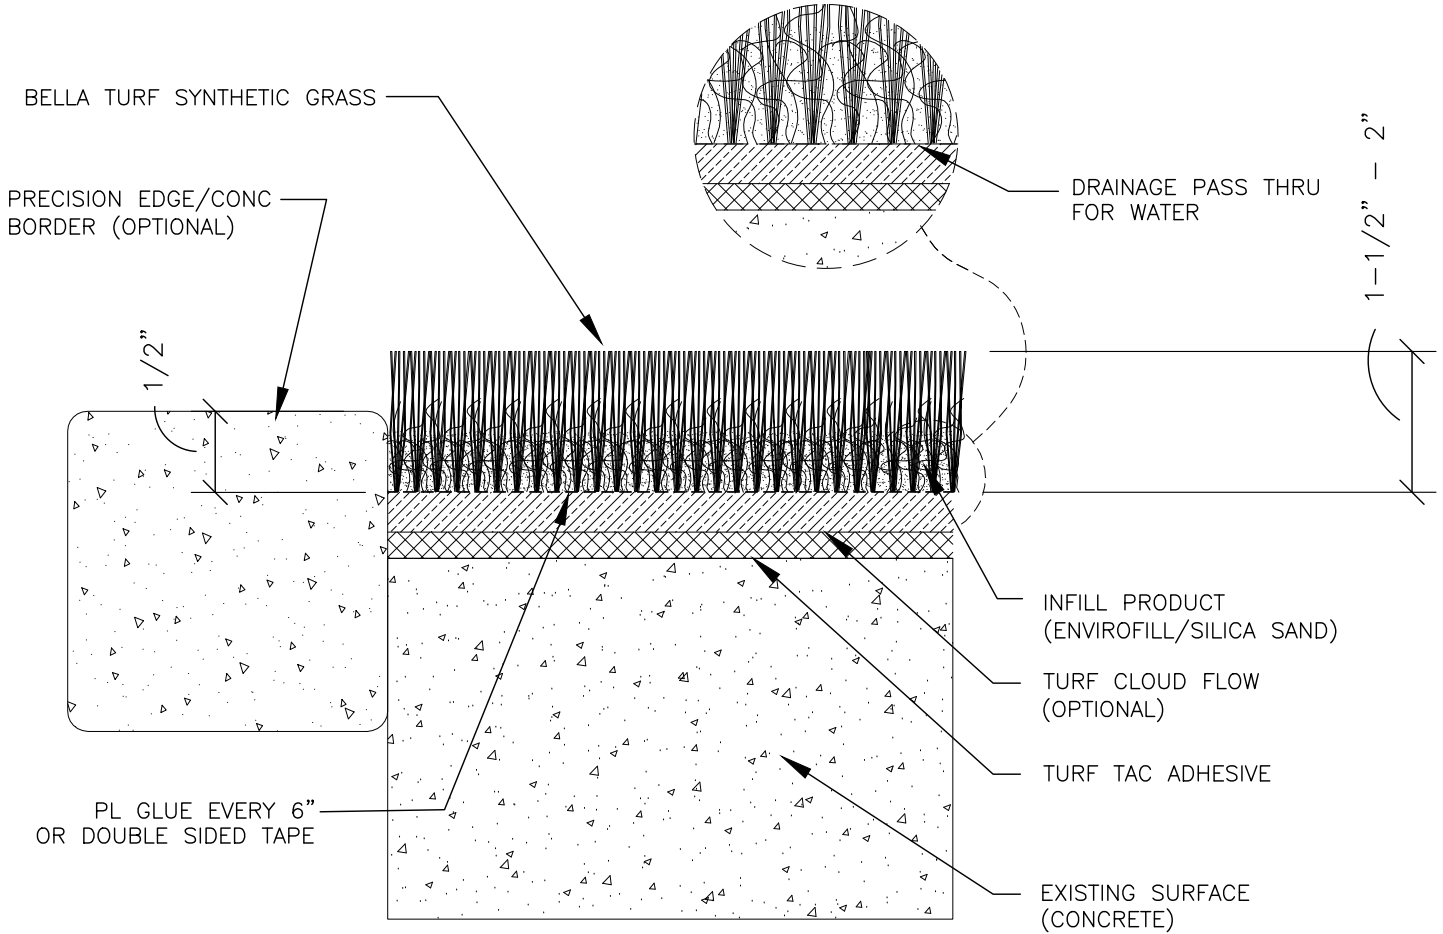

GENERAL NOTES:

- FULL GLUE DOWN OF GRASS BACKING TO TURF CLOUD FLOW IF APPLIED
- SYNTHETIC GRASS PRODUCT INSTALLED WITH GRAIN OF THE FIBRES ALL RUNNING IN THE SAME DIRECTION
- JOINT SEAMS (IF REQUIRED) AS PER MANUFACTURERS RECOMMENDATIONS. REMOVE THREE STITCHES FROM BOTH SIDES OF GRASS AND SEAM TO AN 1/8" GAP TO SIMULATE TUFT GAUGE. CUT TIGHT TO STITCH.
- INFILL PRODUCT APPLIED TO REQUIRED AMOUNT AS PER MANUFACTURERS RECOMMENDATION
- INSTALLATION OF PRODUCT TO BE AS PER THE MANUFACTURERS RECOMMENDATIONS
- DRAWING NOT TO BE SCALED

Bella Turf

Tel. (604)385-4727

#107 - 19347 24th Ave.

Surrey, BC

V3Z 3S9

Tel. (905)276-7333

#5-6 - 600 Orwell St.

Mississauga, ON

L5A 3R9

1-888-970-8771

www.bellaturf.ca